

## LED CANOPY LIGHT



### PRODUCT FEATURES:

- ❖ LUMILEDS LED, high luminous efficiency and long working life.
- ❖ High efficiency LED Driver, wide range input voltage AC120-277V;
- ❖ Die-cast alloy design, better cooling, light quality, LED Tj < 85°C.
- ❖ Optical design, greatly improved the light utilization and evenness
- ❖ **Motion Sensor (Optional)**

MODEL #	
PROJECT:	
NOTES:	
DATE:	
PREPARED BY:	

### Additional Information:



- Power: 45W
- Input: AC 120-277V
- CCT : 5000K
- Output: 4983 LM
- Light Source: LUMILEDS
- Driver: OWN

### Structure Features:

- Shell Material: Alloy/PC
- Color: Dark Bronze
- Weight: 9.3 lbs.

### PRODUCT APPLICATIONS:

1000LED Parking Garage Lighting Series can be widely used in indoor or outdoor lighting (Wet location), excellent for mechanical or electronic processing workshops, storage warehouses, steel mills, gas stations, toll booths, waiting rooms, railway station platforms, indoor stadiums, parking garages and flower cultivating tents etc.


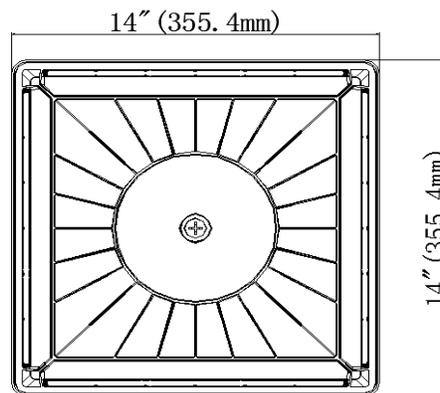
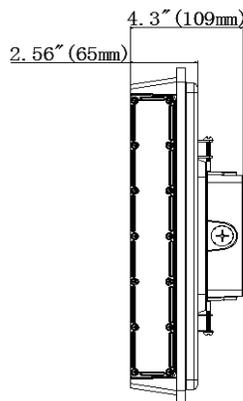


## LED CANOPY LIGHT

### TECHNICAL PARAMETERS:

Type	1L-PGC45W27-XXK		
Power	45W	Lighting Angle	279°
Input Voltage	AC120-277V	LED Brightness Decay	<5%/6000 hrs
PF	>0.95	Working Life	>50000 hrs
Driver Efficiency	>90%	Working Temperature	-30 - +45°C
Luminous Flux	4983 Lm	Storage Temperature	-40 -+80°C
Color Temperature	3000K/4000K/5000K/6500K	Protection Level	Wet Location/IP65
CRI	Ra>80	Cable	Input Connect, 0.3m

### LIGHT DISTRIBUTION: Photometry

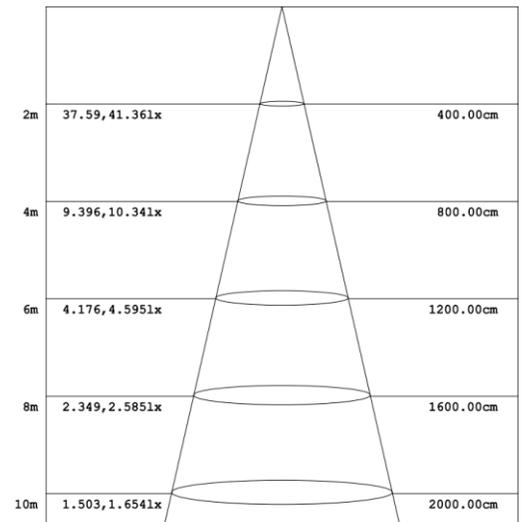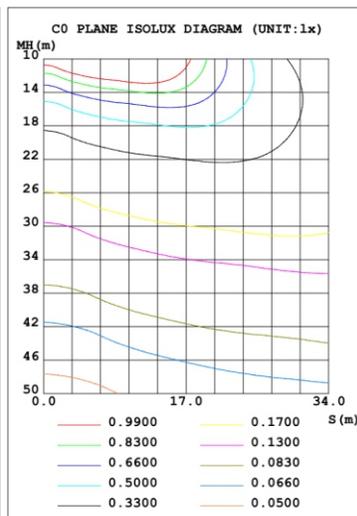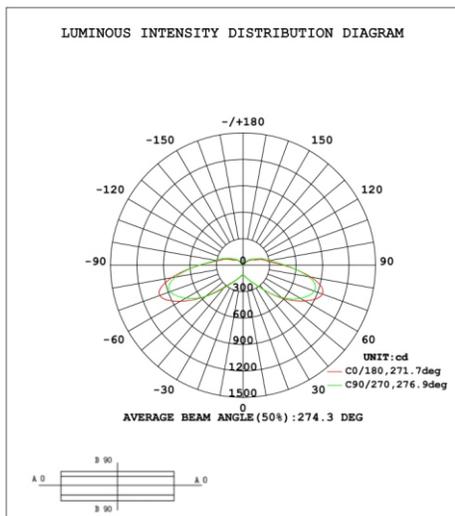

## LED CANOPY LIGHT

### ORDERING INFORMATION:

**EXAMPLE: 1L-PGC 45W 27-XXK**

1L	PGC	45W	27	50K	D	M
Company	Product	Power	Voltage	ColorTemp	Finish	Control
<b>1000LED</b>	<b>PGC</b> Parking Garage Canopy	<b>45W</b> (45W) <b>07W</b> (70W)	<b>27</b> AC120-277V	<b>30K</b> (3000K) <b>40K</b> (4000K) <b>50K</b> (5000K) <b>57K</b> (5700K) <b>± 500K</b>	<b>D</b> Dark Bronze	<b>M</b> Motion Sensor

### PRODUCT CERTIFICATIONS:

