

## LED CANOPY LIGHT



### PRODUCT FEATURES:

- ❖ LUMILEDS LED, high luminous efficiency and long working life.
- ❖ High efficiency LED Driver, wide range input voltage AC120-277V;
- ❖ Die-cast alloy design, better cooling, light quality, LED Tj < 85°C.
- ❖ Optical design, greatly improved the light utilization and evenness

### ❖ Motion Sensor (Optional) Additional Information:

- Power: 65W
- Input: AC 120-277V
- CCT : 5000K
- Output: 7800 LM
- Light Source: LUMILEDS
- Driver: OWN


### Structure Features:

- Shell Material: Alloy/PC
- Color: Dark Bronze
- Weight: 8.5 lbs.

|              |  |
|--------------|--|
| MODEL #      |  |
| PROJECT:     |  |
| NOTES:       |  |
| DATE:        |  |
| PREPARED BY: |  |

### PRODUCT APPLICATIONS:

1000LED Flood Lighting series can be widely used in Canopies, Entryways, Exterior Ceilings, Security Lighting and Parking Garages

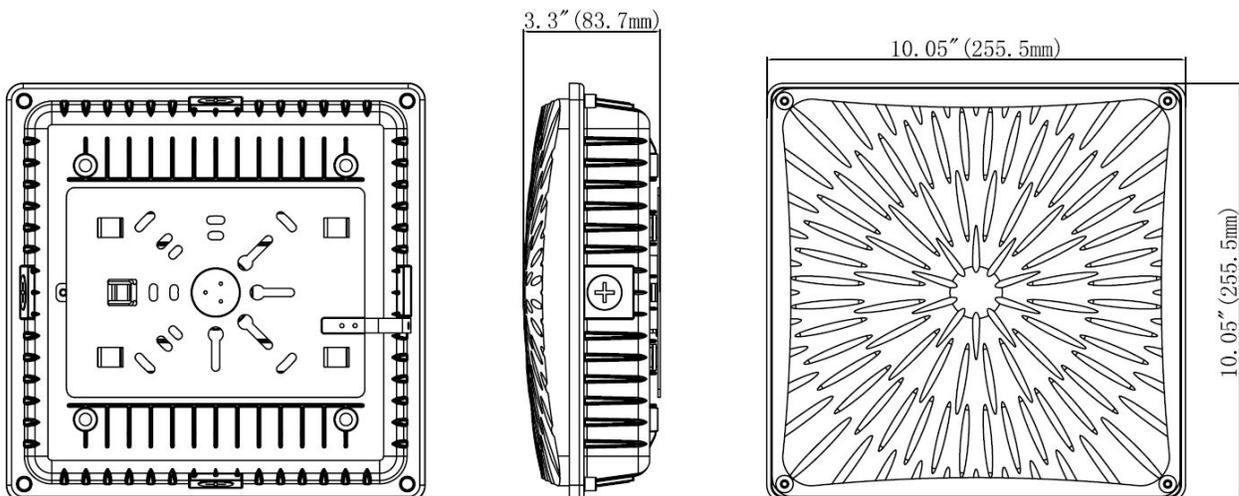


## LED CANOPY LIGHT

### TECHNICAL PARAMETERS:

| Type              | 1L-CP65W27-XXK-Z-M      |                      |                         |
|-------------------|-------------------------|----------------------|-------------------------|
| Power             | 65W                     | Lighting Angle       | 150°                    |
| Input Voltage     | AC120-277V              | LED Brightness Decay | <5%/6000 hrs            |
| PF                | >0.95                   | Working Life         | >50000 hrs              |
| Driver Efficiency | >90%                    | Working Temperature  | -30 - +45°C             |
| Luminous Flux     | 7800 Lm                 | Storage Temperature  | -40 -+80°C              |
| Color Temperature | 3000K/4000K/5000K/5700K | Protection Level     | Wet Location/IP65       |
| CRI               | Ra>80                   | Cable                | Input Connect, No Cable |

### LIGHT DISTRIBUTION CURVE (CLEAR LENS)

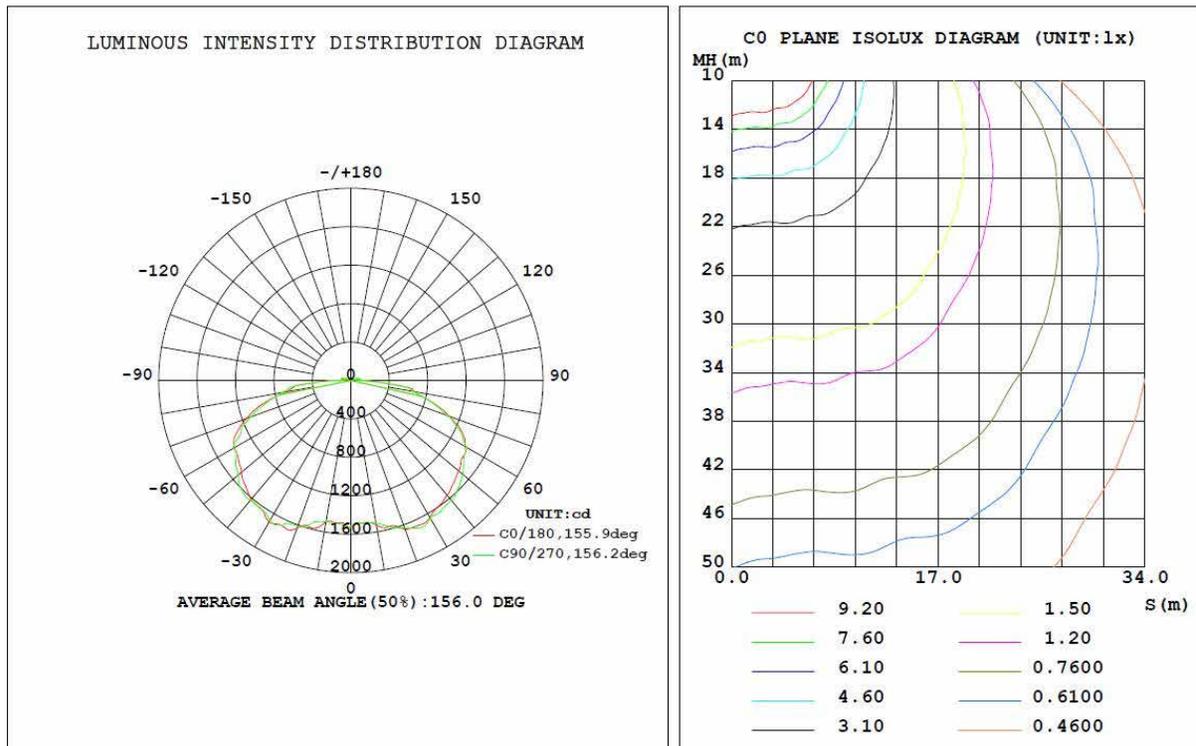

## LED CANOPY LIGHT

### ORDERING INFORMATION:

**EXAMPLE: 1L-CP 65W 27-XXK-D-M**

| 1L             | CP                  | 65W                                  | 27                      | 50K   | D                       | M  |
|----------------|---------------------|--------------------------------------|-------------------------|---|-------------------------|--|
| Company        | Product             | Power                                | Voltage                 | ColorTemp   | Finish                  | Control  |
| <b>1000LED</b> | <b>CP</b><br>Canopy | <b>45W</b> (45W)<br><b>65W</b> (65W) | <b>27</b><br>AC120-277V | <b>30K</b> (3000K)<br><b>40K</b> (4000K)<br><b>50K</b> (5000K)<br><b>57K</b> (5700K)<br><b>± 500K</b> | <b>D</b><br>Dark Bronze | <b>10V</b><br>Dimming 1-10V<br><b>M</b><br>Motion Sensor |

### PRODUCT CERTIFICATIONS:

