

## GLASS WALL PACK LIGHT



### PRODUCT FEATURES:

- ❖ LUMILEDS LED, high luminous efficiency and long working life.
- ❖ High efficiency LED Driver, the wide range input voltage AC120-277V ;
- ❖ Cast alloy design, better cooling, light quality, LED Tj < 85°C.
- ❖ Optical design, greatly improved the light utilization and evenness
- ❖ **PHOTOCELL CONTROL (OPTIONAL)**

|              |  |
|--------------|--|
| MODEL #      |  |
| PROJECT:     |  |
| NOTES:       |  |
| DATE:        |  |
| PREPARED BY: |  |

### Additional Information:

- Power: 70W
- Input: AC 120-277V
- CCT : 5000K
- Output: 8120 LM
- Light Source: LUMILEDS
- Driver: WELED


### Structure Features:

- Shell Material: Alloy & PC
- Color: Dark Bronze
- Weight: 22.9 lbs.



### PRODUCT APPLICATIONS:


The 1000LED LED WALL PACK Lighting Series can be widely used in Pedestrian Walkways, Parking Garages, Public Areas, Schools, Hospitals, Hotels and Outdoor Walkways

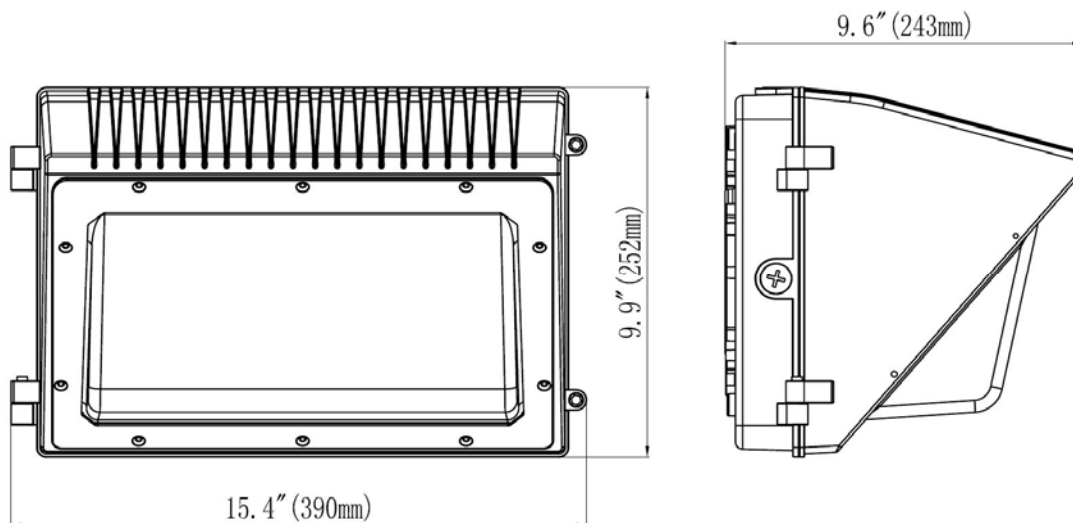

### TECHNICAL PARAMETERS:

| Type              | 1L-GWP07W27-XXK-Z-P     |                      |                         |
|-------------------|-------------------------|----------------------|-------------------------|
| Power             | 70W                     | Lighting Angle       | 90°*120°                |
| Input Voltage     | AC120-277V              | LED Brightness Decay | <5%/6000 hrs            |
| PF                | >0.95                   | Working Life         | >50000 hrs              |
| Driver Efficiency | >90%                    | Working Temperature  | -30 - +45℃              |
| Luminous Flux     | 8120 Lm                 | Storage Temperature  | -40 -+80℃               |
| Color Temperature | 3000K/4000K/5000K/6500K | Protection Level     | Wet Location/IP65       |
| CRI               | Ra>80                   | Cable                | Input Connect, No Cable |

### LIGHT DISTRIBUTION CURVE: (Clear Lens)

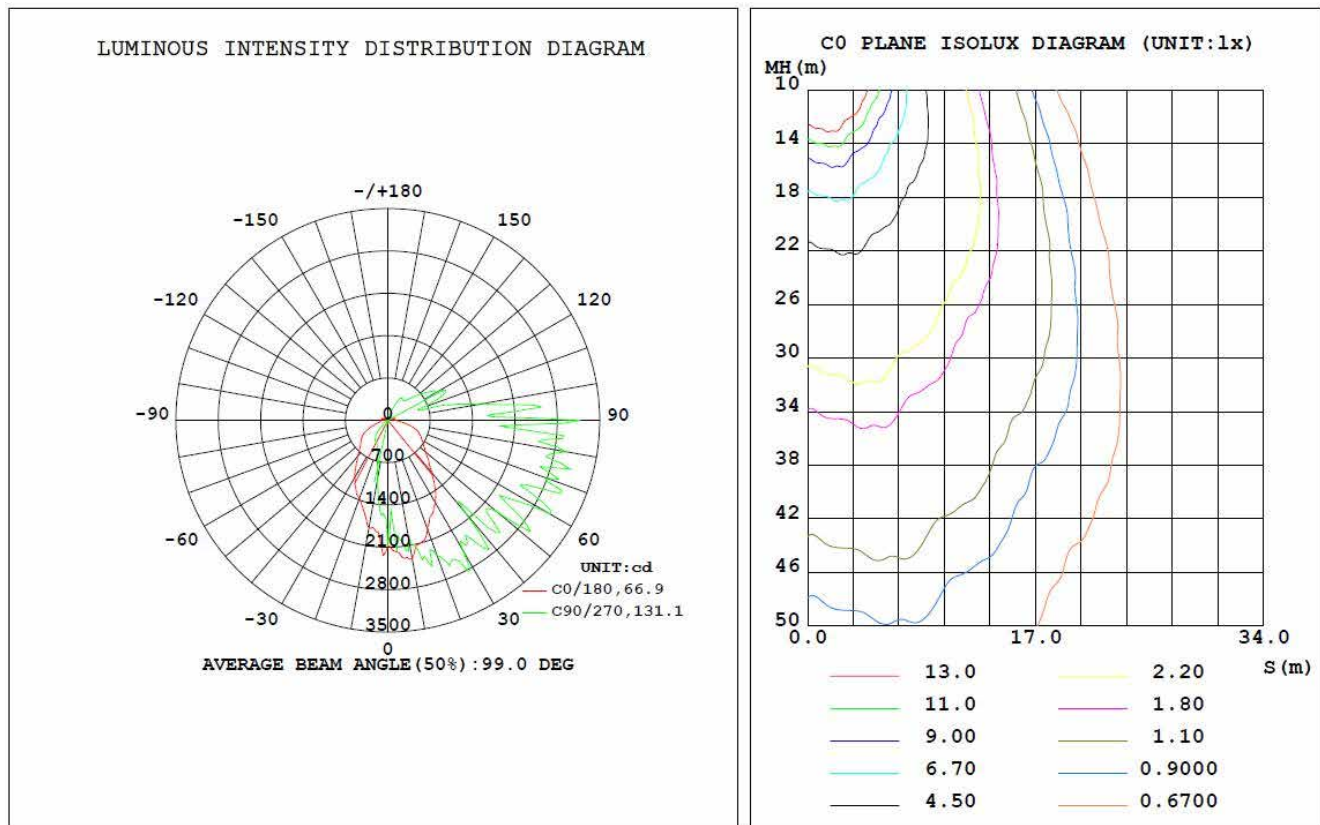

**70W****GLASS WALL PACK LIGHT****ORDERING INFORMATION:****EXAMPLE: 1L-GWP07W 27-XXK-Z-P**

| 1L      | GWP                       | 07W                                  | 27                                   | 50K  | P                       |
|---------|---------------------------|--------------------------------------|--------------------------------------|--|-------------------------|
| Company | Product                   | Power                                | Voltage                              | ColorTemp  | Control                 |
| 1000LED | FWP<br>Glass<br>Wall Pack | 05W (50W)<br>07W (70W)<br>10W (100W) | 27<br>AC120-277V<br>48<br>AC200-480V | 30K (3000K)<br>40K (4000K)<br>50K (5000K)<br>65K (6500K)<br>± 500K | P<br>100-277V PHOTOCELL |

**PRODUCT CERTIFICATIONS:****1000LED INC.****Email: [info@1000LED.com](mailto:info@1000LED.com)****Website: [www.1000LED.com](http://www.1000LED.com)****Toll-free: (877) 340-1700**