

LINEAR HIGH BAY

PRODUCT FEATURES:

- ❖ Optical design, greatly improved the light utilization and evenness
- ❖ High efficiency LED Driver, voltage AC120-277 ;
- ❖ Cast Aluminum design, better cooling, light quality, LED Tj < 85°C.
- ❖ Motion Sensor Control (Optional)
- ❖ 1-10V dimming (10%-100%) standard



MODEL #	
PROJECT:	
NOTES:	
DATE:	
PREPARED BY:	


Additional Information:

- Power: 150W
- Input: AC 120-277V
- CCT : 5000K
- Output: 20835 LM
- Light Source: LUMILEDS
- Driver: WELED POWER



PRODUCT APPLICATIONS:

The 1000LED LINEAR HIGH BAY LED Lighting Series can be widely used for Indoor Lighting. Excellent for Warehouses, Gymnasiums, Supermarkets, Workshops, Waiting Rooms, Railway Station Platforms and many other applications

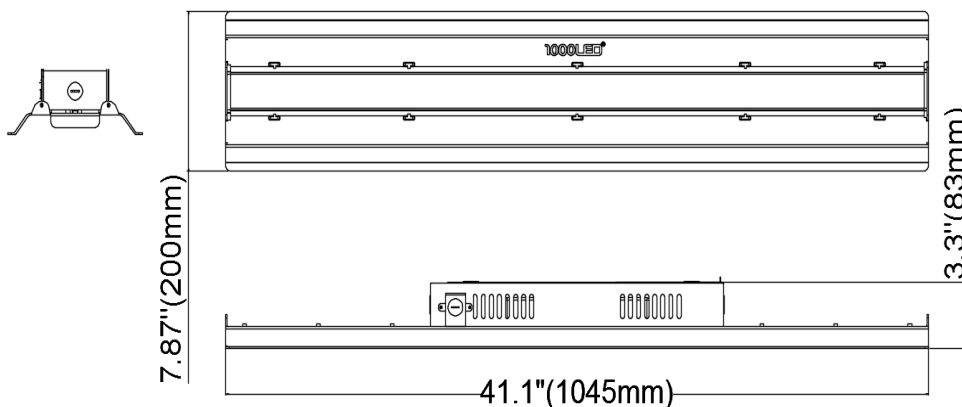

Structure Features:




- Shell Materials: Aluminum & PC
- Finish: White
- Net Weight: 4.4KG (9.7 LBS)
- Product Size: 1045mm*200mm*83mm
- Carton Size: 1100mm*265mm*160mm

LINEAR HIGH BAY

TECHNICAL PARAMETERS:

Type	1L-15W4FTHB27-XXK-Z		
Power	150W	Lighting Angle	110°
Input Voltage	AC120-277V	LED Brightness Decay	<5%/6000 hrs
PF	>0.99	Working Life	>75000 hrs
Driver Efficiency	>90%	Working Temperature	-30 - +45°C
Luminous Flux	20835 Lm	Storage Temperature	-40 - +80°C
Color Temperature	4000K/5000K	Protection Level	Damp
CRI	Ra>70	Cable	Input Connect, 0.5m

PHOTOMETRY:

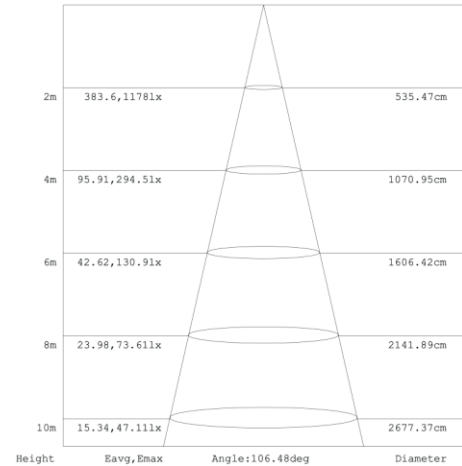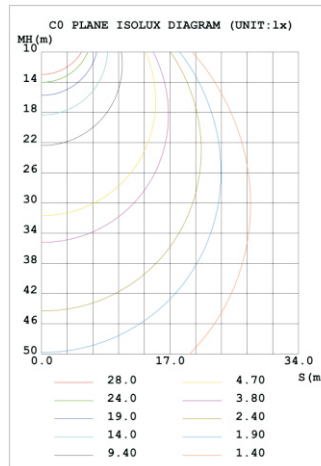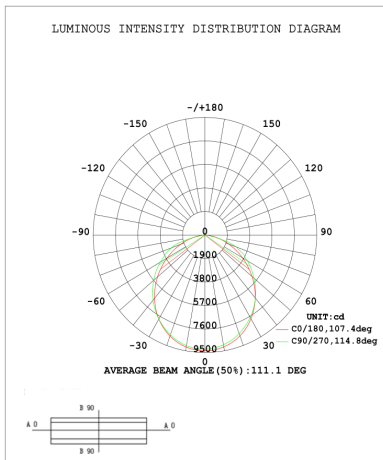

ORDERING EXAMPLE: 1L-15W4FTHB27-XXK-Z-M

	15W	4FTHB	27	XXK	Z	M
Company	Power	Product	Voltage	ColorTemp	FINISH	Control
1000LED	15W(150W) 19W(190W) 30W(300W)	4FTHB 4 FOOT LINEAR HIGH BAY LIGHT	27 AC120-277V	40K (4000K) 50K (5000K) ± 500K	W White	M Motion Sensor