

CANOPY LIGHT



PRODUCT FEATURES:

- ❖ Optical design, greatly improved the light utilization and evenness
- ❖ High efficiency LED Driver, voltage AC120-277 ;
- ❖ Cast Aluminum design, better cooling, light quality, LED Tj < 85°C.
- ❖ Motion Sensor Control (Optional)
- ❖ 1-10V dimming (10%-100%) standard

Additional Information:

- Power: 70W
- Input: AC 120-277V
- CCT : 5000K
- Output: 9800 LM
- Light Source: LUMILEDS
- Driver: NOVBO POWER




MODEL #	
PROJECT:	
NOTES:	
DATE:	
PREPARED BY:	



PRODUCT APPLICATIONS:

The 1000LED CANOPY LED Lighting Series can be widely used for Indoor or Outdoor (Wet Location) Excellent for Museums, Art Galleries, Underground Parking Lots, Residential Areas, Industrial Areas and many other applications

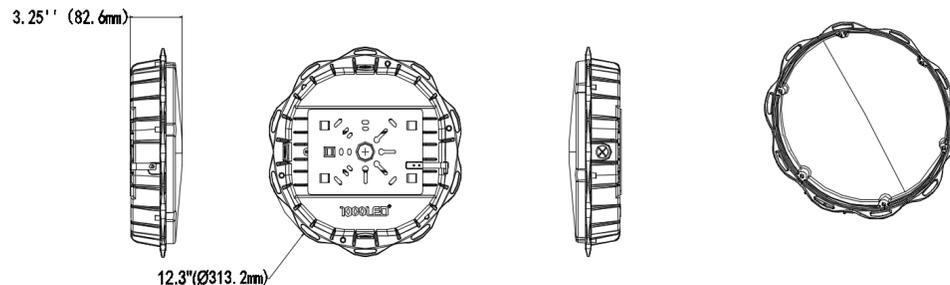

Structure Features:




- Shell Materials: Aluminum & PC
- Finish: Dark Bronze/White
- Net Weight: 2.5KG (5.51 LBS)
- **Product Size: 313.2mm*82.6mm**
- **Carton Size: 355mm*355mm*260mm**

CANOPY LIGHT

TECHNICAL PARAMETERS:

Type	1L-70WCP27-XXK-Z		
Power	70W	Lighting Angle	145°
Input Voltage	AC120-277V	LED Brightness Decay	<5%/6000 hrs
PF	>0.99	Working Life	>75000 hrs
Driver Efficiency	>90%	Working Temperature	-30 - +45°C
Luminous Flux	9800 Lm	Storage Temperature	-40 - +80°C
Color Temperature	4000K/5000K	Protection Level	Wet Location/IP66
CRI	Ra>70	Cable	Input Connect, 0.3m

PHOTOMETRY:

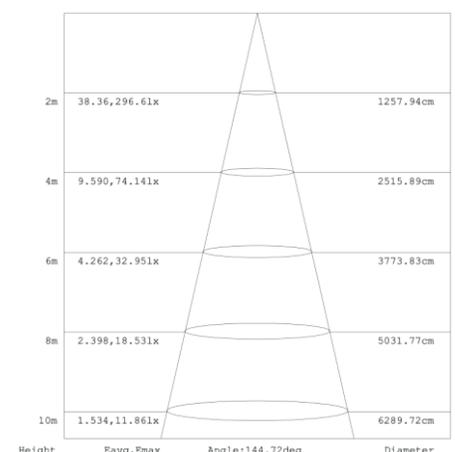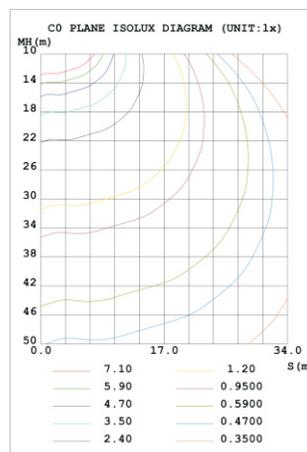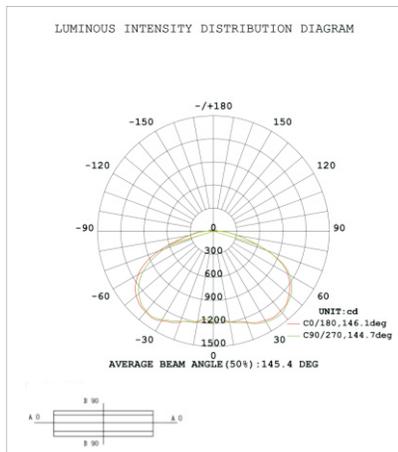

ORDERING EXAMPLE: 1L-70WCP27-XXK-Z-M

1L	70W	CP	27	XXK	Z	M
Company	Power	Product	Voltage	ColorTemp	FINISH	Control
1000LED	45W(45W) 70W(70W)	CP Canopy Light	27 AC120-277V	40K (4000K) 50K (5000K) ± 500K	D Dark Bronze W White	M Motion Sensor