

WRAPAROUND LIGHT

PRODUCT FEATURES:

- ❖ Optical design, greatly improved the light utilization and evenness
- ❖ High efficiency LED Driver, voltage AC120-277 ;
- ❖ Sheet iron design, better cooling, light quality, LED Tj < 85℃.
- ❖ The 0-10V Dimming type is continuous.



| | |
|--------------|--|
| MODEL # | |
| PROJECT: | |
| NOTES: | |
| DATE: | |
| PREPARED BY: | |

Additional Information:

- Power: 40W
- Input: AC 120-277V
- CCT : 5000K
- Output: 5372 LM
- Light Source: SEOUL



PRODUCT APPLICATIONS:

The Wraparound LED Lighting Series can be widely used for Indoor Excellent for Offices, Hallways, Multipurpose Rooms , Office Buildings, Conference Rooms,super market, store and many other applications.

Specifications


Wraparound-2FT/4FT
 Length:622MM/1211.8MM(24.5"/47.7")
 Width: 180MM(7.1")
 Depth:71MM(2.8")
 Weight:4.45/7.94 (lbs)

Packaging information

- ❖ **Inside the box:**1235MMX186MMX76MM
48.6"X7.32"X3"
- ❖ **carton:**1250MMX326MMX207MM(A case of four)
49.2"X12.83"X8.15"

Mounting

- ❖ Surface Mounting.



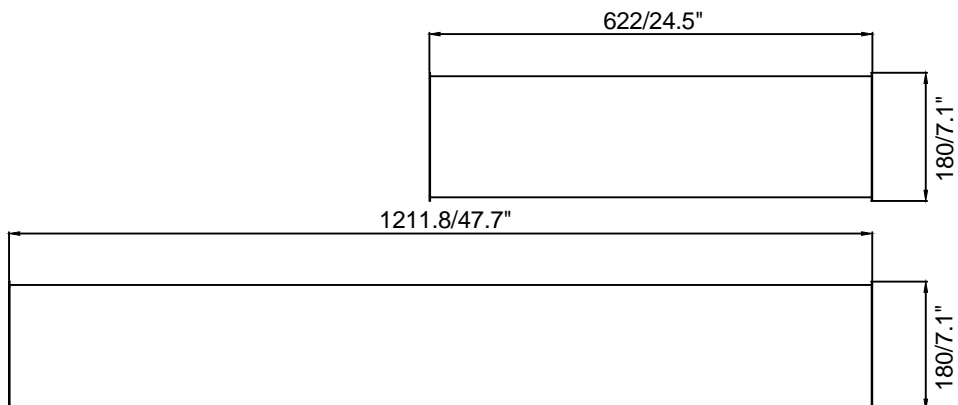


WRAPAROUND LIGHT

TECHNICAL PARAMETERS:

| Type | R P 4 F T 4 0 W - X X K | | |
|-------------------|-------------------------|----------------------|-------------------------|
| Power | 40W | Lighting Angle | 101° |
| Input Voltage | AC120-277V | LED Brightness Decay | <5%/6000 hrs |
| PF | >0.98 | Working Life | >75000 hrs |
| Driver Efficiency | >90% | Working Temperature | -20 - +50℃ |
| Luminous Flux | 6539 Lm | Storage Temperature | -20 - +50℃ |
| Color Temperature | 4000K/5000K | Protection Level | Dry |
| CRI | Ra>80 | Cable | Input Connect, No Cable |

PHOTOMETRY:

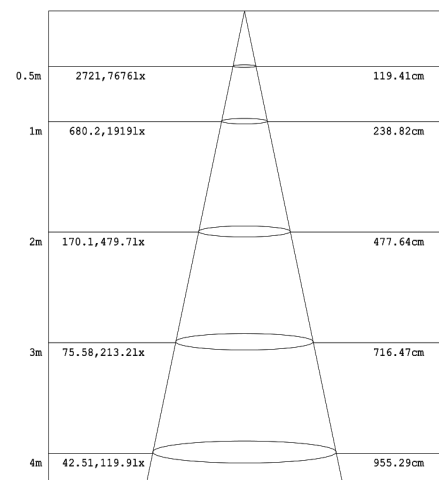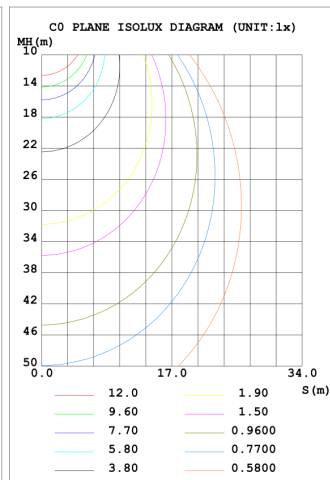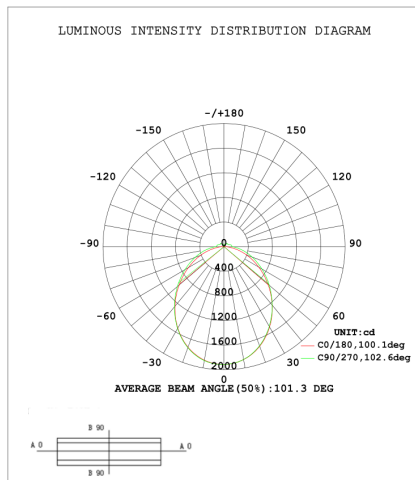

ORDERING EXAMPLE:RP4FT40W-XXK

| RP | 4FT | 40W | XXK |
|----------------------|--------------|-----------|-------------|
| Product | Size | Power | ColorTemp |
| RP | 2 FT (2feet) | 40W | 40K (4000K) |
| Led Wraparound Light | 4 FT (4feet) | 40W (40W) | 50K (5000K) |